


Paper



60 mm

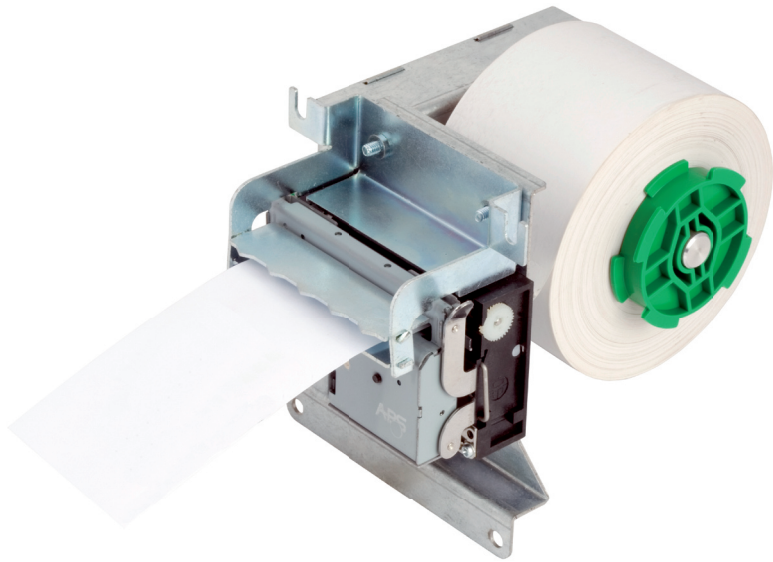

Note: printout is performed on the bottom of the ticket.

Features

- 2 inches paper width
- 80 mm/s printing speed
- 100 mm/max paper roll diameter
- Ultra reliable cutter
- Black mark detection
- Plugs on the APS CP290-MRS Printer
- Features all print capability of APS' MRS Series, including Windows drivers

Applications

- ID Automation
- OEM
- Panel mount printers
- Gas (petrol) pumps

Specifications

PMP290-MRS

Printing method	Thermal line printing
Number of dots	432
Resolution (dots/mm)	8
Printing width (mm)	54
Paper width MAX (mm)	60
Max. paper thickness (µ)	60/80
Ticket length (mm)	40 minimum
Paper retraction	N
Cutter life	Min 300K cuts
Dimensions (WxHxD mm)	114x118x160
TPH reliability	50Km/100M pulses
Voltage range	24V ± 10%
Weight (g)	780
Paper detection	Opto Sensor
Paper loading	Automatic
External paper roll diameter MAX (mm)	100
Internal paper roll diameter (mm)	13
Operating temperature	from -10°C to +60°C non cond.
Operating humidity (%)	20 to 85 non cond.
Character set	3 resident + downloadable
Character size	8x16 / 12x20 / 7x16
Interface	RS232 standard
Peak head consumption (A)	Programmable from 1.5 to 7
Printing speed (mm/s)	Up to 80
Graphics	5 modes
Barcodes	UPC-A-E, EAN 13-8, Code 39, ITF 2/5, Codabar, Code 128 A-B-C
Included	Pushbutton and led board, NEOP sensor

Options

Windows Drivers

